

PANTHER®

Scale Terminal




**Put Speed and Accuracy in Your Weighing
and Process Control Applications**

METTLER TOLEDO

Small in size and high in performance, the PANTHER scale terminal offers outstanding value


The PANTHER scale terminal is a compact, easy-to-use weight terminal for analog scales. Rugged yet versatile, it is available in a harsh environment stainless steel enclosure that can be column, wall, or desk mounted, or in a compact panel mount version.

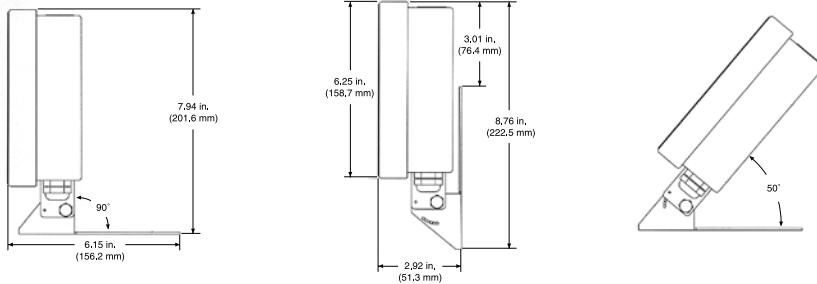

Specifications	Harsh Environment (column-, wall-, or desk-mounted)	Panel Mount
Physical Dimensions (W x D x H)	178 x 66 x 159 mm (7 x 2.58 x 6.25 in)	170 x 130 x 90 mm (6.75 x 5.2 x 3.62 in)
Construction	Stainless steel construction designed to provide Certified TYPE 4x and IP65 protection	Stainless steel front panel Certified TYPE 4 and IP65 protection when mounted in appropriate enclosure
Power	Universal AC power supply works with 100, 120, 220, 240 VAC power sources	
Operating Temperature	-10°C to 45°C (14°F to 113°F)	
Display	12.7 mm / 0.55 in high, 7-digit, 7-segment vacuum fluorescent numeric display	
Keypad	6-function	
Scale Performance	Internal resolution 1,000,000; External 10,000	
Scale Interface (Analog)	Maximum of eight 350 ohm analog load cells	
Scale Update Rate	>300 Hz	
Digital Filtering	METTLER TOLEDO exclusive TraxDSP™ filtering	
Process Control	2 setpoints with preact zero tolerance	
Checkweighing	4 targets with 5 zones each	
Discrete Outputs/Inputs	3 outputs / 1 input / 5 zones status LEDs	3 outputs / 1 input / 3 zone status LEDs
Serial Interface	Standard RS-232 printer connections or bi-directional serial continuous output	
Shipping Weight	2.5 kg (5.5 lb)	
Options	Analog output (0-10 V or 4-20 mA analog output) Three high level outputs for switching between 28-230 VAC (panel mount only) Direct PLC connectivity (Allen-Bradley RIO®, PROFIBUS®, DeviceNet®, or Modbus Plus®)	

Standard Features:

- **Process Control Connectivity** – The PANTHER terminal can be integrated with process control equipment through a variety of methods, including discrete I/O, 4-20 mA or 0-10 V analog output, Allen-Bradley RIO®, Modbus Plus®, PROFIBUS®, and DeviceNet®.
- **Flexible Uses** – Select standard weighing, batch process weighing or manual checkweighing.
- **Built-In Setpoints** – Built-in setpoints can be used to create hybrid automated control systems or for batch process and filling applications.
- **Adjustable Filtering** – The PANTHER terminal includes the METTLER TOLEDO exclusive TraxDSP® vibration rejection and superior noise filtering, which can be adjusted to minimize response time and get stable weights even when the scale has a mixer or agitator mounted on it.
- **Hazardous Area Applications** – The PANTHER terminal can interface with scale bases used in hazardous areas when installed with appropriate barriers. The panel-mount analog load cell version has been Factory Mutual approved for use in Division 2 and Zone 2 areas. This version has also been KEMA certified as a Category 3 G/D device for use in Zone 2 and Zone 22 areas.

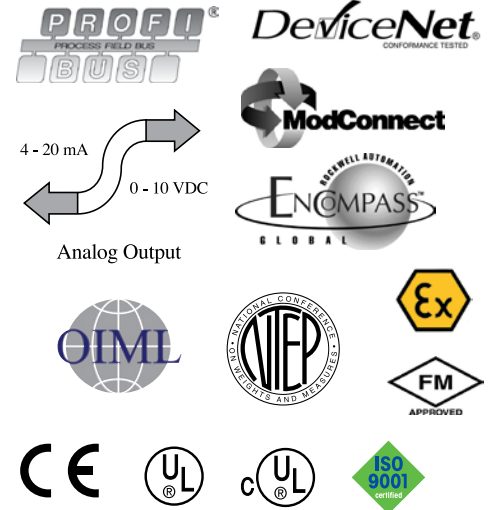

For more information, contact your authorized METTLER TOLEDO representative or one of the regional offices below.

	TEL	FAX		TEL	FAX	
METTLER TOLEDO USA 1900 Polaris Parkway Columbus, Ohio 43240 TEL: (800) 523-5123 (614) 438-4511 FAX: (614) 438-4900	Australia (61-3) 9644 5700	(61-3) 9645 3935	Kazakhstan (7-3272) 50 63 69	(7-3272) 98 08 35	(7-3272) 98 08 35	www.mt.com
METTLER TOLEDO Sales International 8606 Greifensee Switzerland TEL: (41-44) 944 2211 FAX: (41-44) 944 3060	Austria (43-1) 604 1980	(43-1) 604 2880	Korea (82-2) 3498-3500	(82-2) 3498-3555	(82-2) 3498-3555	
	Belgium (32-2) 334 0211	(32-2) 334 0334	Malaysia (60-3) 7845 5773	(60-3) 7845-8773	(60-3) 7845-8773	Specifications subject to change without notice ©2006 Mettler-Toledo, Inc.
	Brazil (55-11) 4166-7400	(55-11) 4166-7401	Mexico (52-5) 547 5700	(52-5) 541 2228	(52-5) 541 2228	METTLER TOLEDO®, and Panther® are registered trademarks of Mettler-Toledo, Inc.
	Canada (800) 638-8537	(905) 681-8036	Netherlands (31-344) 638363	(31-344) 638390	(31-344) 638390	ENCOMPASS™ is a trademark of Rockwell Automation.
	China, Shanghai (86-21) 6485 0435	(86-21) 6485 3351	Norway (47) 22 30 44 90	(47) 22 32 70 02	(47) 22 32 70 02	Modbus Plus® and ModConnect® are registered trademarks of AEG Schneider Automation, Inc.
	China, Changzhou (86-519) 664 2040	(86-519) 664 1991	Philippines (86-2) 864 1600	(86-2) 864 1600	(86-2) 864 1600	PROFIBUS® is a registered trademark of PROFIBUS.
	China, Hong Kong (852) 2744 1221	(852) 2744 6878	Poland (48-22) 651-9232	(48-22) 651-7172	(48-22) 651-7172	Printed in USA.
	Croatia (385-1) 29 58 130	(385-1) 29 58 140	Russia (7-095) 921 9211	(7-095) 921 6353	(7-095) 921 6353	INSTRUMENTS INT041.8E
	Czech Republic (420-2) 721-23150	(420-2) 721-23170	Singapore (65) 6890 0011	(65) 6890 0012	(65) 6890 0012	
	Denmark (45-43) 27 08 00	(45-43) 27 08 28	Slovak Republic (421-2) 4342-7496	(421-2) 4333-7190	(421-2) 4333-7190	
	France (33-1) 30 97 17 17	(33-1) 30 97 16 16	Slovenia (386-1) 562-1801	(386-1) 562-1789	(386-1) 562-1789	
	Germany (49-641) 50 70	(49-641) 52951	Spain (34-93) 223-7600	(34-93) 223-0271	(34-93) 223-0271	
	Hungary (36-1) 288-4040	(36-1) 288-4050	Sweden (46-8) 702 50 00	(46-8) 642 45 62	(46-8) 642 45 62	
	India (91-22) 2857-0808	(91-22) 2857-5071	Switzerland (41-1) 944 45 45	(41-1) 944 45 10	(41-1) 944 45 10	
	Indonesia (62-21) 6583 3731	(62-21) 6583 3741	Taiwan (886-2) 2579-5955	(886-2) 2579-5977	(886-2) 2579-5977	
	Italy (39-02) 333321	(39-02) 356-2973	Thailand (66-2) 723-0300	(66-2) 719-6479	(66-2) 719-6479	
	Japan (81-3) 5762-0606	(81-3) 5762-0756	United Kingdom (44-116) 235 7070	(44-116) 236 6399	(44-116) 236 6399	